

## Product Datasheet

# 26-Port Full Gigabit PoE Fiber Switch

ONV-POE33024PFB



## OVERVIEW


The ONV-POE33024PFB is a full gigabit PoE fiber switch independently developed by ONV. It has 24\*10/100/1000M RJ45 ports and 2\*1000M SFP ports. Port 1-24 can support IEEE 802.3af/at standard PoE power supply. single port PoE power reaches 30W, and the maximum PoE output power is 250W. As a PoE power supply device, it can automatically detect and recognize the power receiving equipment that meets the standard and supply power through the network cable. It can supply power to POE terminal equipment such as wireless AP, webcam, VoIP, visual intelligent building intercom through network cable, and meet the network environment that needs high-density PoE power supply. It is suitable for hotel, campus, park, attraction, supermarket, factory quarter and small and medium-sized enterprises to form a cost-effective network.

Unmanaged model, plug and play, no configuration, easy to use.

## FEATURE

### ■ Full gigabit access, gigabit SFP port uplink

- ◇ All series supports "gigabit Ethernet port and gigabit SFP fiber port " combination, which enables users to flexibly build networking to meet the needs of various scenarios.
- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on backpressure.

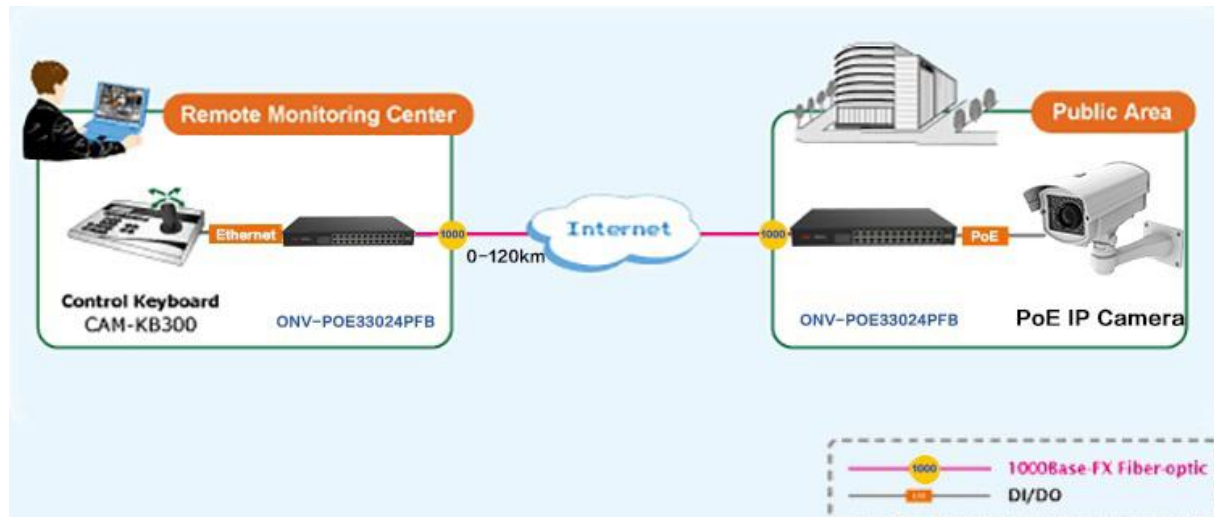

### ■ Intelligent PoE power supply

- ◇ 24\*10/100/1000Base-T RJ45 ports, meeting the needs of security monitoring, teleconferencing system, wireless coverage, and other scenarios.
- ◇ IEEE 802.3af/at PoE standard, without damaging non-PoE devices.
- ◇ Priority system for PoE port, it will supply power to the high priority level port first when the power budget is insufficient and avoid overwork of the device.

### ■ Stable and reliable


- ◇ Low power consumption, no fan, galvanized steel casing,
- ◇ Self-developed power supply, high redundancy design, providing a long term and stable PoE power output.
- ◇ CCC,CE, FCC, RoHS.
- ◇ The user-friendly panel, it can show the device status through the LED indicator of PWR,PoE.
- ◇ Plug and play, no configuration, simple and convenient.

## TECHNICAL SPECIFICATION

Model	ONV-POE33016PFB	ONV-POE33024PFB
<b>Interface Characteristics</b>		
Fixed Port	16*10/100/1000Base-T PoE ports(Data/Power) 2*1000Base-X SFP ports (Data)	24*10/100/1000Base-T PoE ports(Data/Power) 2*1000Base-X SFP ports (Data)
Ethernet Port	Port 1-16 can support 10/100/1000Base-T, auto-sensing, full/half duplex MDI/MDI-X	Port 1-24 can support 10/100/1000Base-T, auto-sensing, full/half duplex MDI/MDI-X
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP(≤100 meter) 100BASE-TX: Cat5 or later UTP(≤100 meter) 1000BASE-T: Cat5e or later UTP(≤100 meter)	
SFP Slot Port	Gigabit SFP optical fiber interface, default matching optical modules (optional order single-mode / multi-mode, single fiber / dual fiber optical module. LC)	
Optical Cable	Multi-mode: 850nm 0 ~ 550M, single mode: 1310nm 0 ~ 40KM, 1550nm 0 ~ 120KM.	
<b>Chip Parameter</b>		
Network Protocol	IEEE802.3 10BASE-T; IEEE802.3i 10Base-T IEEE802.3u 100Base-TX, IEEE802.3ab 1000Base-T IEEE802.3z 1000Base-X, IEEE802.3x	
Forwarding Mode	Store and Forward(Full Wire Speed)	
Switching Capacity	48Gbps (Non-blocking)	52Gbps (Non-blocking)
Forwarding Rate@64byte	26.78Mpps	38.69Mpps
MAC	8K	


Buffer Memory	4M	
Jumbo Frame	9.6K	
LED Indicator	Power:PWR (green ), network 1-16(24)/ G1-2 (green), POE: PoE (green)	
Reset Switch	Yes, One-button factory reset	
<b>PoE &amp; Power Supply</b>		
PoE Port	Port 1 to 16	Port 1 to 24
Power Supply Pin	Default 1/2 (+), 3/6 (-)	
Max Power Per Port	30W; IEEE802.3af/at	
Total PWR / Input Voltage	250W (AC100-240V)	
Power Consumption	Standby<18W, full Load<240W	Standby<25W, full Load<250W
Power Supply	Built in power supply, AC100~240V 50-60Hz 4.1A Short circuit, over current, overload protection.	
<b>Physical Parameter</b>		
Operation TEMP / Humidity	-20~+55°C;5%~90% RH Non condensing	
Storage TEMP / Humidity	-40~+75°C;5%~95% RH Non condensing	
Dimension (L*W*H)	270.5*181*44.5mm	330*204*44mm
Net /Gross Weight	<1.7kg /<2.2kg	<2.3kg /<3kg
Installation	Desktop, wall mounted,19 inch 1U cabinet	
<b>Certification &amp; Warranty</b>		
Lightning protection / protection level	Lightning protection: 4KV 8/20us; Protection level: IP30	
Certification	CCC;CE mark, commercial; CE/LVD EN60950;FCC Part 15 Class B; RoHS;	
Warranty	3 years, lifelong maintenance.	

## DIMENSION

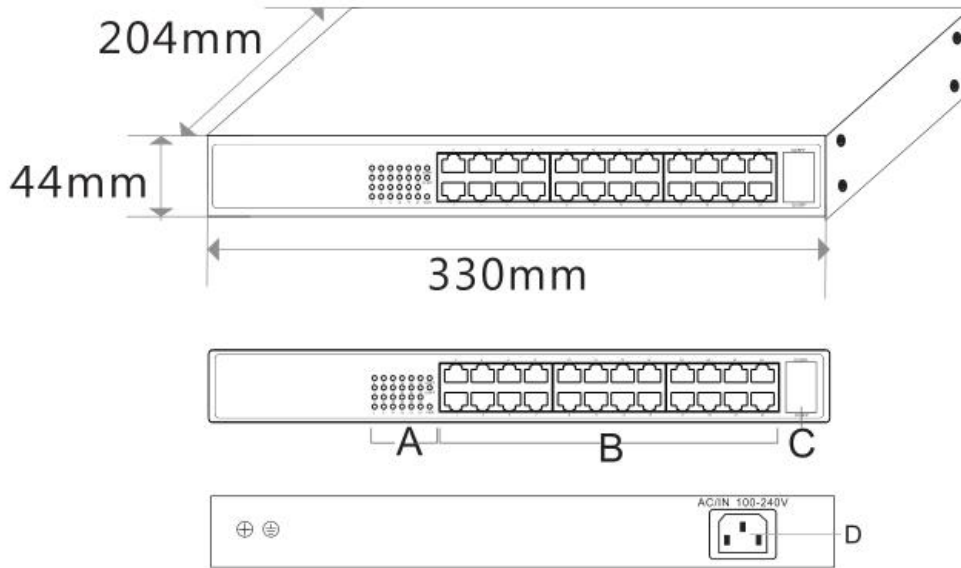

- A. Working LED Indicator
- B. 24\* POE port
- C. 2\*gigabit SFP Port
- D. power input port: AC100-240.50-60HZ

## APPLICATION

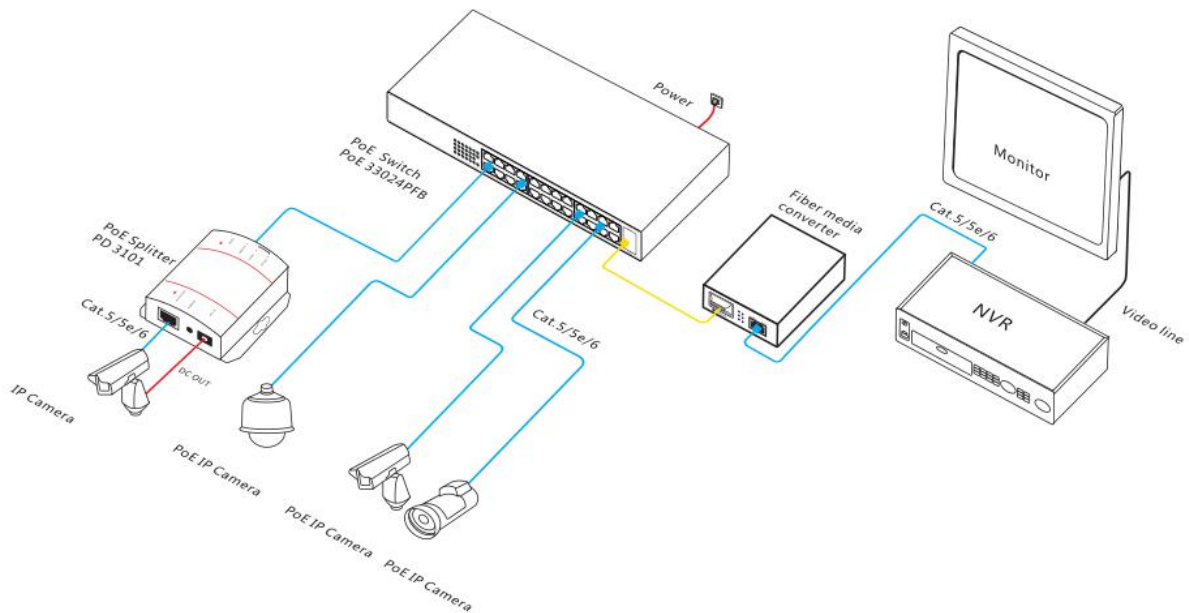

## ORDERING INFORMATION

Model	Description	Configure Power Supply
ONV-POE33016PFB	Unmanaged PoE fiber switch with 16*10/100/1000M RJ45 ports and 2*1000M uplink SFP fiber slot ports, port 1-16 can support IEEE 802.3af/at PoE standard. Support 1U/19 inch rack installation.	250W
ONV-POE33024PFB	Unmanaged PoE fiber switch with 24*10/100/1000M RJ45 ports and 2*1000M uplink SFP fiber slot ports, port 1-24 can support IEEE 802.3af/at PoE standard. Support 1U/19 inch rack installation.	250W

**Note:** The SFP optical module is not included by default and needs to be purchased separately.

## PACKING LIST

	CONTENT	QTY	UNIT
PACKING LIST	26-Port full gigabit PoE fiber switch	1	SET
	AC power cable	1	PC
	Mounting Kits(Hanging Ear)	1	SET
	User Guide	1	PC
	Warranty Card	1	PC

## OPTICAL MODULE INFORMATION

Product	Model	Description	Unit
1.25G Optical Module	ONV-2630	SFP optical module, 1.25G, multi mode dual fiber 850nm, transmission distance: 550m, LC interface, support DDM function, support hot plug and pull.	PC
	ONV-2632	SFP optical module, 1.25G, single-mode dual fiber 1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	ONV-2612-T	SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	ONV-2613-R	SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	ONV-2612-T-S C	SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, SC interface, support DDM function, support hot plug and pull.	PC
	ONV-2613-R-S C	SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, SC interface, support DDM function, support hot plug and pull.	PC
Power Module	ONV-2633	1.25G SFP optical module transfers to 10/100/1000M RJ45 port.	PC

## CONTACT US



Optical Network Video Technologies (Shenzhen) Co., Ltd.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

Email: [onv@onv.com.cn](mailto:onv@onv.com.cn)

Website: [www.onvcom.com](http://www.onvcom.com)

Zip: 518000

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen, China

Factory Address: The 4-6th Floor, No. 59, HuaNing Road, Xinwei Community, Dalang Street,  
Longhua District, Shenzhen, China

